



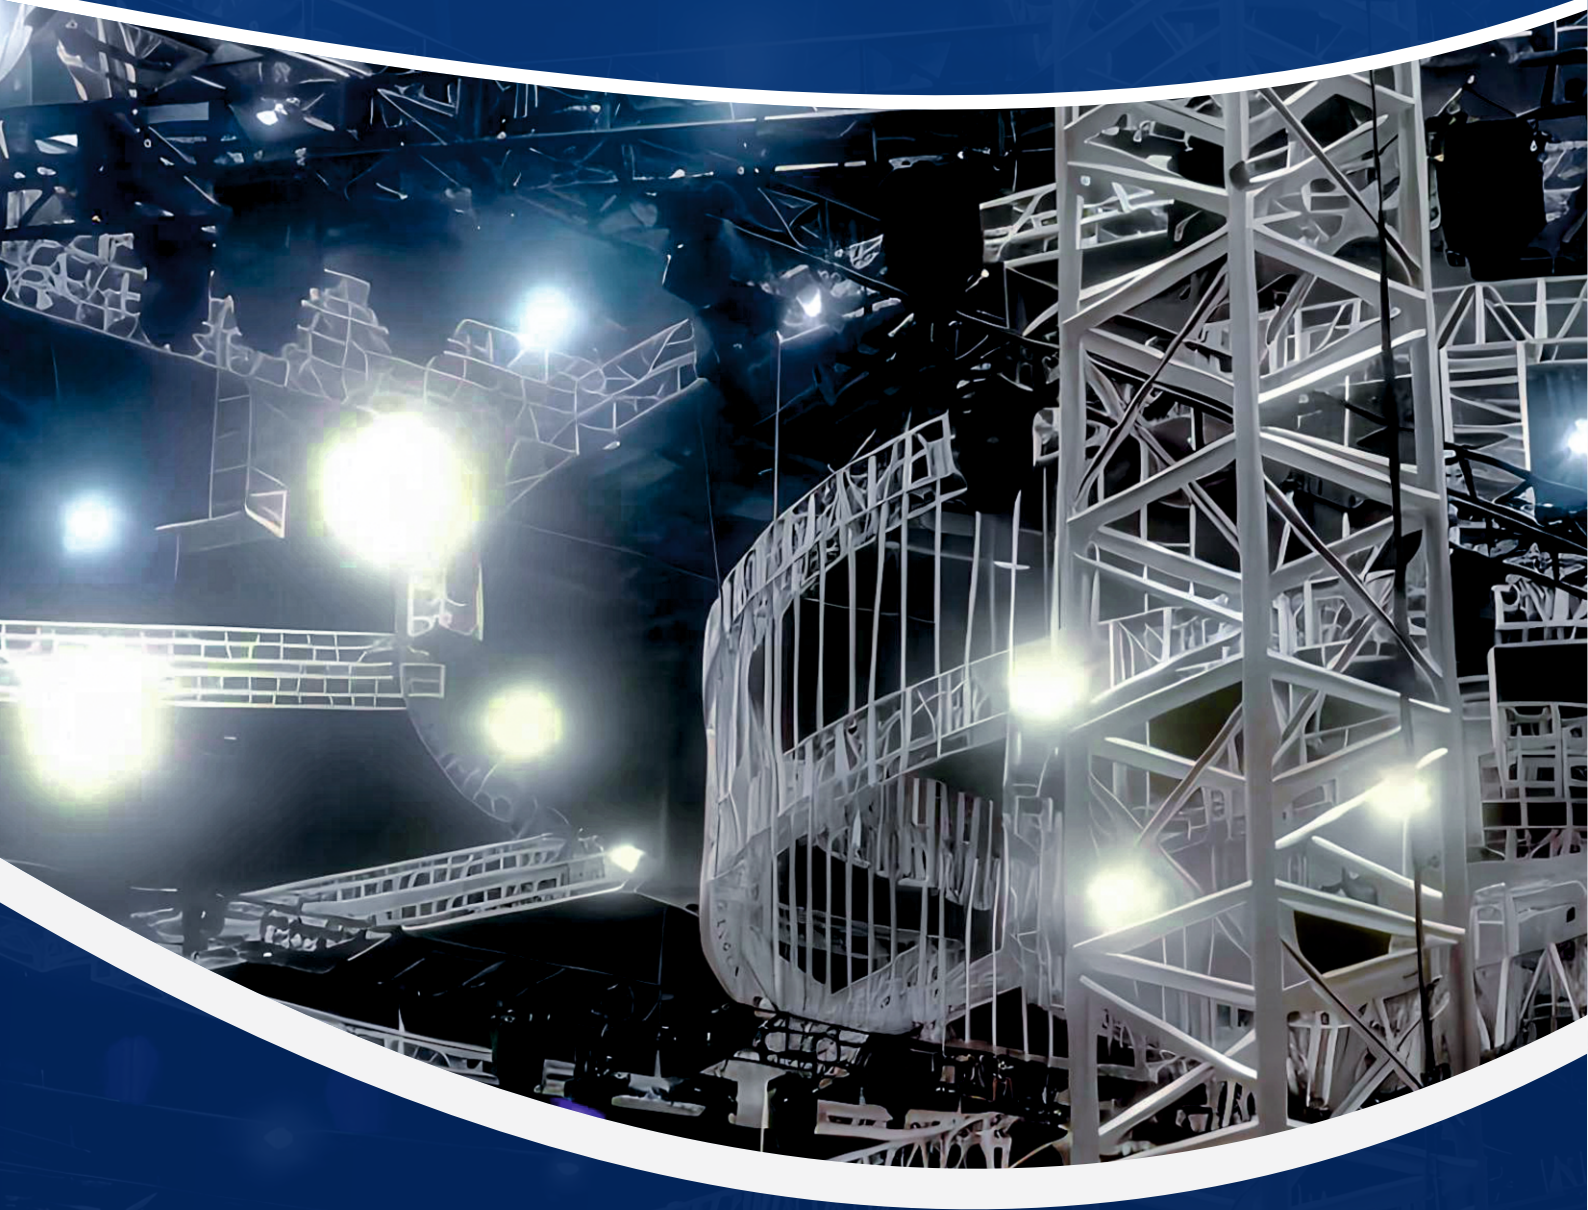

DYNO TRUSS
TRUSS - STAGE DECK - SCAFFOLD- PA TOWER

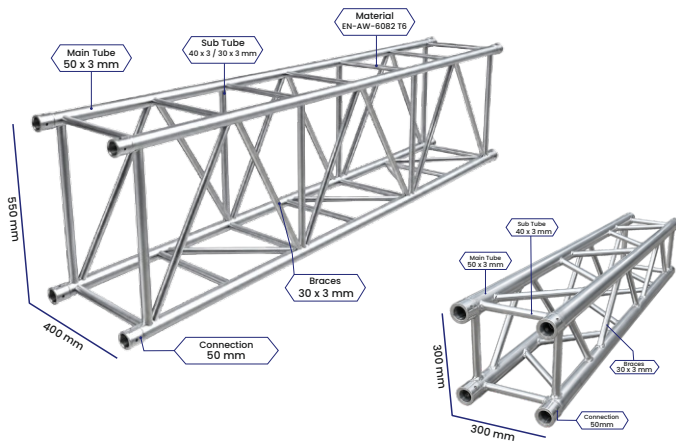


DTS-TXI – Light & Efficient

Profile: 550 x 400 mm / 300 x 300 mm

Size : 60 x 40 - 24 Feet Height

Details	Horizontal Truss (BEAM)	Vertical Truss (PILLAR)
Main Tube	50 x 3 mm	50 x 3 mm
Sub Tube	40 x 3 / 30 x 3 mm	40 x 3 mm
Braces	30 x 3 mm	30 x 3 mm
Connection	50 mm	50 mm
Weight (10 ft)	32 Kgs	22 Kgs
Material	EN-AW-6082 T6	EN-AW-6082 T6
Welding Rod	5356	5356

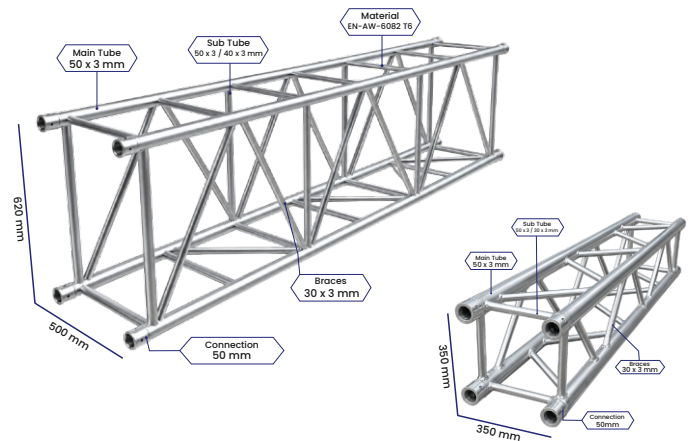


DTS- TXII - Powered

Profile: 620 x 500 mm / 350 x 350 mm

Size : 60 x 60 - 30 Feet Height

Details	Horizontal Truss (BEAM)	Vertical Truss (PILLAR)
Main Tube	50 x 4 mm	50 x 3 mm
Sub Tube	50 x 3 / 40 x 3 mm	50 x 3 / 30 x 3 mm
Braces	30 x 3 mm	30 x 3 mm
Connection	50 mm	50 mm
Weight (10 ft)	39 Kgs	26 Kgs
Material	EN-AW-6082 T6	EN-AW-6082 T6
Welding Rod	5356	5356

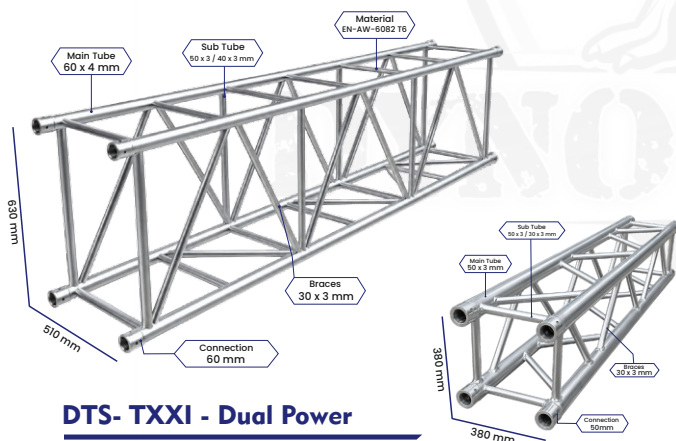


DTS- TXXI - Dual Power

Profile: 630 x 510 mm / 380 x 380 mm

Size : 70 x 70 - 30 Feet Height

Details	Horizontal Truss (BEAM)	Vertical Truss (PILLAR)
Main Tube	60 x 4 mm	50 x 3 mm
Sub Tube	50 x 3 / 40 x 3 mm	50 x 3 / 30 x 3 mm
Braces	30 x 3 mm	30 x 3 mm
Connection	60 mm	50 mm
Weight (10 ft)	44 Kgs	26 Kgs
Material	EN-AW-6082 T6	EN-AW-6082 T6
Welding Rod	5356	5356

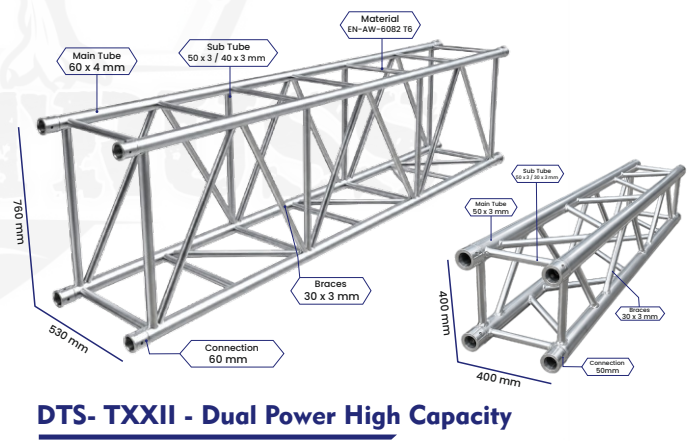


DTS- TXXII - Dual Power High Capacity

Profile: 760 x 530 mm / 400 x 400 mm

Size : 80 x 80 - 40 Feet Height

Details	Horizontal Truss (BEAM)	Vertical Truss (PILLAR)
Main Tube	60 x 4 mm	50 x 3 mm
Sub Tube	50 x 3 / 40 x 3 mm	50 x 3 / 30 x 3 mm
Braces	30 x 3 mm	30 x 3 mm
Connection	60 mm	50 mm
Weight (10 ft)	46 Kgs	31 Kgs
Material	EN-AW-6082 T6	EN-AW-6082 T6
Welding Rod	5356	5356

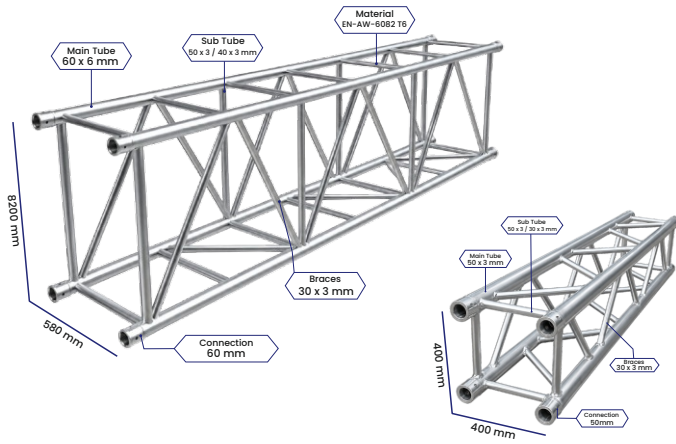


DTS- TXRX - Reinforced Powered

Profile: 820 x 580 mm / 400 x 400 mm

Size : 100 x 100 - 40 Feet Height

Details	Horizontal Truss (BEAM)	Vertical Truss (PILLAR)
Main Tube	60 x 6 mm	50 x 3 mm
Sub Tube	50 x 3 / 40 x 3 mm	50 x 3 / 30 x 3 mm
Braces	30 x 3 mm	30 x 3 mm
Connection	60 mm	50 mm
Weight (10 ft)	58 Kgs	31 Kgs
Material	EN-AW-6082 T6	EN-AW-6082 T6
Welding Rod	5356	5356

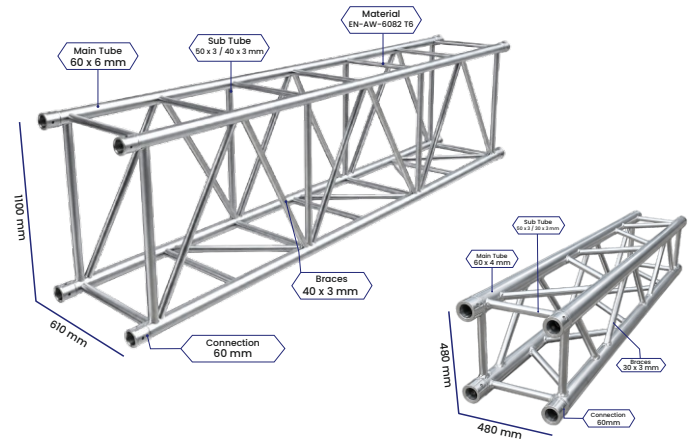


DTS- TXRR - Re-Reinforced

Profile: 1100 x 610 mm / 480 x 480 mm

Size : 120 x 120 - 46 Feet Height

Details	Horizontal Truss (BEAM)	Vertical Truss (PILLAR)
Main Tube	60 x 6 mm	60 x 4 mm
Sub Tube	50 x 3 / 40 x 3 mm	50 x 3 / 30 x 3 mm
Braces	40 x 3 mm	30 x 3 mm
Connection	60 mm	60 mm
Weight (10 ft)	63 Kgs	42 Kgs
Material	EN-AW-6082 T6	EN-AW-6082 T6
Welding Rod	5356	5356

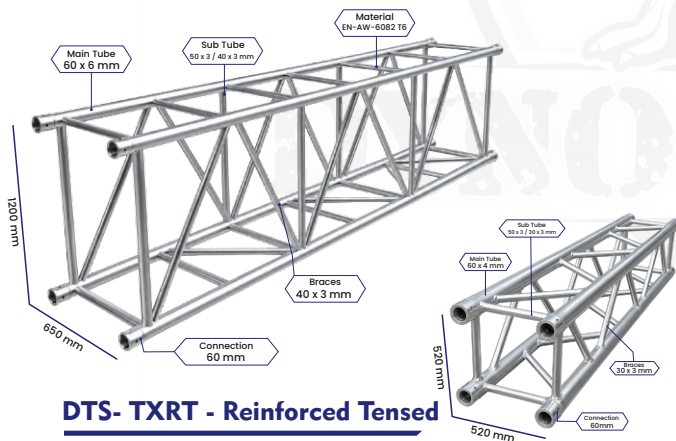

DTS- TXRT - Reinforced Tensed

Profile: 1200 x 650 mm / 520 x 520 mm


Size : 120 x 120 - 46 Feet Height (Increased Load Capacity)

Details	Horizontal Truss (BEAM)	Vertical Truss (PILLAR)
Main Tube	60 x 6 mm	60 x 4 mm
Sub Tube	50 x 3 / 40 x 3 mm	50 x 3 / 30 x 3 mm
Braces	40 x 3 mm	30 x 3 mm
Connection	60 mm	60 mm
Weight (10 ft)	65 Kgs	45 Kgs
Material	EN-AW-6082 T6	EN-AW-6082 T6
Welding Rod	5356	5356

Stage Deck



Ring Lock Scaffold

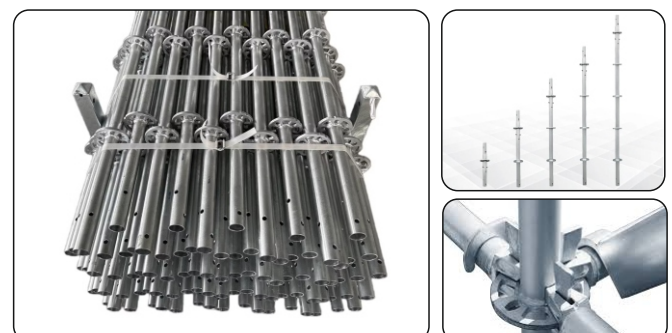



NAVIN THAKUR

☎ +91 75818 12000 +9196857 84040

🌐 dynotruss.com

📍 97/1, Indore Bhopal Bypass, Near Palnagar Toll Tax,
Dewas, M.P 455111

